

# 40401160X3C3D

PF160-CD SURFACE OR HANGED 26,6W 3000K LOUVER 1130mm



Linear luminary with direct lighting, three-dimensional louver with bright aluminium, for continuous lines or as single luminary, with less dazzle.

## EFFECTIVE LIGHTING INFORMATION

FLUX	3102,3Lm
LM/W	116,6lm/w
Consumption	26,6W
Opening angle	91,8°

\* Please ask, for other power or lighting flux.

## LED FEATURES


Colour Temperature	3000K
LED efficiency	153 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Lighting flux maintenance	L80
LED deterioration	B10
CRI	80
UGR	<19

## FEATURES

	Hanged/Surface
	5 years guarantee
	IP20 Water tightness
	IK04 Mechanical resistor
	2,36Kg

## ELECTRICAL INFORMATION

	230V/50Hz
	ON/OFF On/Off Power Supply
	Class I

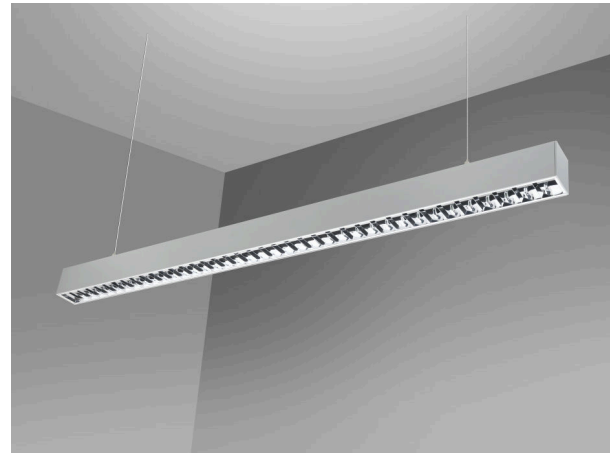

RAL9003 (Text. white)      RAL9006 (Text. Grey)      RAL9005 (Text.Black)



40401160B3C3D




40401160G3C3D




40401160N3C3D

\* For other finishes, please, ask for availability.

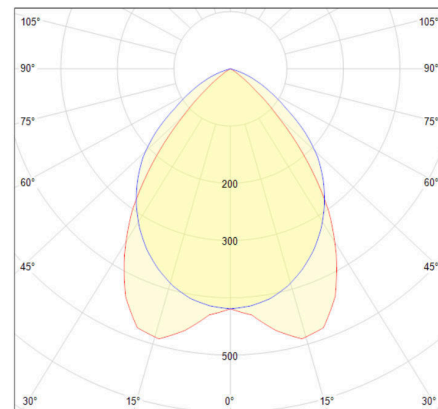

## MEASUREMENTS

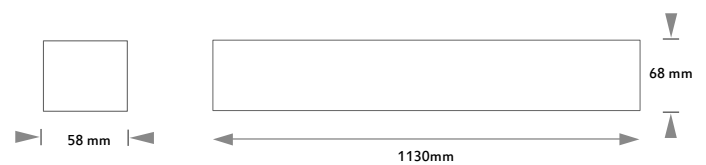

## ACCESSORIES

### Endcap



Textured white endcap.  
Textured grey endcap.  
Textured black endcap.

40410160SPBT  
40410160SPGT  
40410160SPNT


### Suspension kits



Suspension kits

40408SUSPEPF

### Support



Textured white wall support.  
Textured grey wall support.  
Textured black wall support.

40408SP160BT  
40408SP160GT  
40408SP160NT

### Ceiling rose



White profile ceiling rose 2 m.  
Grey profile ceiling rose 2 m.  
Black profile ceiling rose 2 m.

50501CONJFLB  
50501CONJFLG  
50501CONJFLN

### Continuous line wiring with quick connector



Wiring line 3 poles  
Wiring line 5 poles

50501CABLC3P  
50501CABLC5P

### Joining piece



Joining piece

40408UNION160

## OPTIONS

### Dali adjustment



Add "R" to the product's code

### Emergency kit 1 hour



Emergency kit 1 hour

50501KITEME1

### Possibility to cut 45 degree angle



Possibility to cut 45 degree angle under project

### High flux led strip



High flux led strip