

40401160X3C6D

PF160-CD SURFACE OR HANGED 46,9W 3000K LOUVER 1970mm



Linear luminary with direct lighting, three-dimensional louver with bright aluminium, for continuous lines or as single luminary, with less dazzle.

EFFECTIVE LIGHTING INFORMATION

FLUX	5430,18Lm
LM/W	115,66lm/w
Consumption	46,9W
Opening angle	91,8°

*Please ask, for other power or lighting flux.

LED FEATURES


Colour Temperature	3000K
LED efficiency	153 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Lighting flux maintenance	L80
LED deterioration	B10
CRI	80
UGR	<19

FEATURES

	Hanged/Surface
	5 years guarantee
IP20	Water tightness
IK04	Mechanical resistor
	4,06Kg

ELECTRICAL INFORMATION

U_{IN}	230V/50Hz
ON/OFF	On/Off Power Supply
	Class I

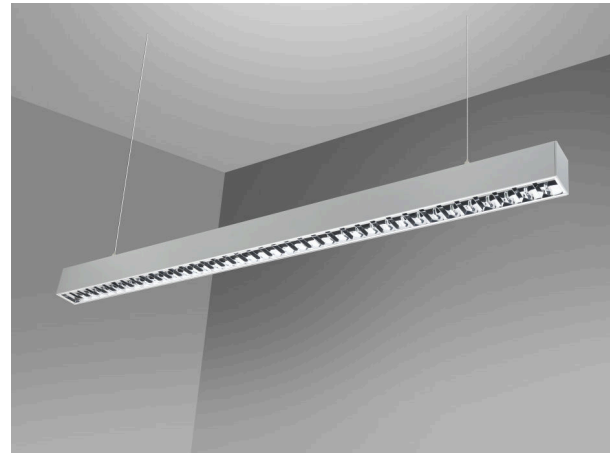

RAL9003 (Text. white) RAL9006 (Text. Grey) RAL9005 (Text.Black)



40401160B3C6D




40401160G3C6D




40401160N3C6D

* For other finishes, please, ask for availability.

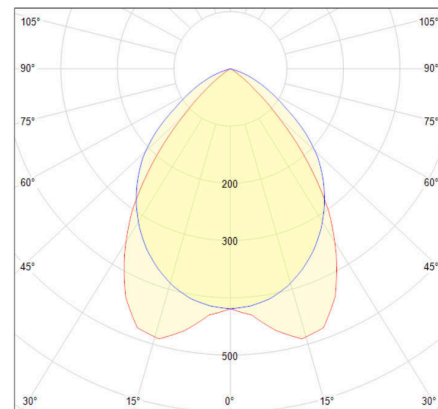

MEASUREMENTS

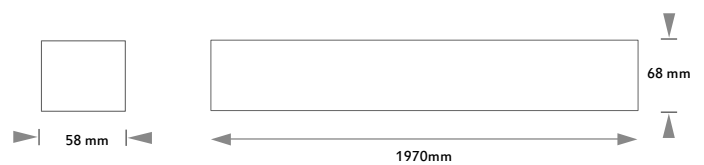

ACCESSORIES

Endcap



Textured white endcap.
Textured grey endcap.
Textured black endcap.

40410160SPBT
40410160SPGT
40410160SPNT


Suspension kits



Suspension kits

40408SUSPEPF

Support



Textured white wall support.
Textured grey wall support.
Textured black wall support.

40408SP160BT
40408SP160GT
40408SP160NT

Ceiling rose



White profile ceiling rose 2 m.
Grey profile ceiling rose 2 m.
Black profile ceiling rose 2 m.

50501CONJFLB
50501CONJFLG
50501CONJFLN

Continuous line wiring with quick connector



Wiring line 3 poles
Wiring line 5 poles

50501CABLC3P
50501CABLC5P

Joining piece



Joining piece

40408UNION160

OPTIONS

Dali adjustment



Add "R" to the product's code

Emergency kit 1 hour



Emergency kit 1 hour

50501KITEME1

Possibility to cut 45 degree angle



Possibility to cut 45 degree angle under project

High flux led strip



High flux led strip