

4040116TX3H2



LINEAR LUMINAIRE PF160 ADAPTED TO THREE-PHASE TRACK HIGH 38W 3000K OPAL 850mm

Linear luminaire with direct lighting, high performance opal diffuser. High quality extruded aluminium body. Designed for incorporation of a three-phase track.

EFFECTIVE LIGHTING INFORMATION

FLOW	4480 Lm
LM/W	117,9 lm/w
Consumption	38 W
Opening angle	112°

*For any other power or light flux, please consult.




*For other finishes, please check availability.

LED FEATURES

Color temperatures	3000K
LED Efficiency	163 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Maintenance of Luminous Flux	L80
LED Degradation	B10
CRI	80

FEATURES

	Adapted to a three-phase track
	5 years of warranty
IP20	Waterthightness
IK04	Mechanical strength
	2,1Kg

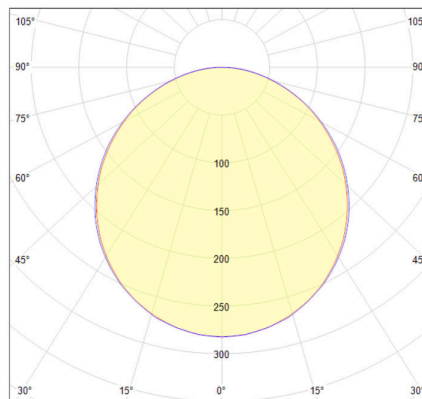

ELECTRICAL INFORMATION

U _{IN}	230V/50Hz
ON/OFF	On/Off Power Supply
	Class I

MEASUREMENTS

