

# 4040116TX4H6

## LINEAR LUMINAIRE PF160 ADAPTED TO THREE-PHASE TRACK HIGH 88W 4000K OPAL 1970mm

Linear luminaire with direct lighting, high performance opal diffuser. High quality of extruded aluminium body. Designed for incorporation of a three phase track.

### EFFECTIVE LIGHTING INFORMATION

FLOW	10880 Lm
LM/W	123,6 lm/w
Consumption	88W
Opening angle	112°

\*For any other power or light flux, please consult.






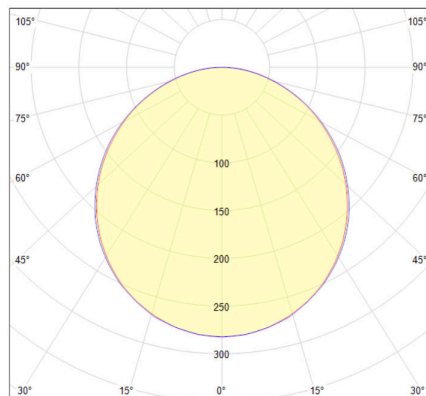
\*for other finishes check availability.

### LED FEATURES


Color temperature	4000K
LED Efficiency	171 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Maintenance of Luminous Flux	L80
LED Degradation	B10
CRI	80

### FEATURES

	Adapted to a three phase track
	5 years of warranty
IP20	Watertightness
IK04	Mechanical strength
	4,3Kg



### ELECTRICAL INFORMATION

$U_{IN}$	230V/50Hz
ON/OFF	On/Off Power Supply
	Class I

### MEASUREMENTS

