

# 40402170X4C1D

PF170-CD DE EMPOTRAR 26,6W 4000K LOUVER 570mm



Double strip linear luminaire with three-dimensional bright aluminium lamellas, for continuous lines or as single luminary, to make a control in dazzle.








## EFFECTIVE LIGHTING INFORMATION

FLUX	3090,03Lm
LM/W	115,90Lm/w
Consumption	26,6W
Opening angle	89,2°


## LED FEATURES

Colour temperature	4000K
LED efficiency	160 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Lighting flux maintenance	L80
LED deterioration	B10
CRI	80
UGR	<19

## FEATURES

	Hanged/surface
	5 years guarantee
	Water tightness
	Mechanical resistor
	1.5Kg
	<19
	575x112mm

## ELECTRICAL INFORMATION

$U_{IN}$	230V/50Hz
ON/OFF	On/Off Power Supply
	Class I



RAL9003 (Text. White)

RAL9006 (Text. Grey)

RAL9005 (Text. Black)



40402170B4C1D




40402170G4C1D




40402170N4C1D

\* For other finishes, please, ask for availability.

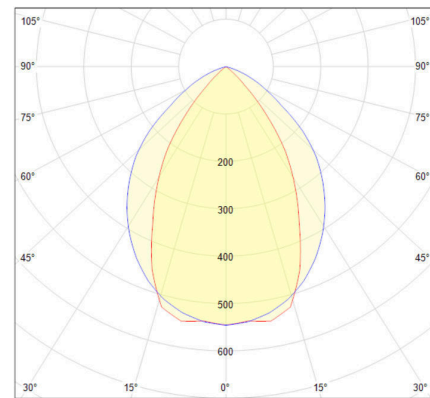

## MEASUREMENTS

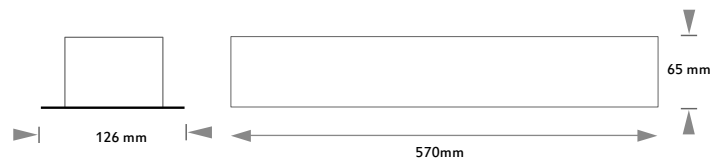

## ACCESSORIES

### Endcap



Textured white endcap.  
Textured grey endcap.  
Textured black endcap.

40410170SPBT  
40410170SPGT  
40410170SPNT


### Suspension kits



Suspension kits

40408SUSPEPF

### Support



Textured white wall support.  
Textured grey wall support.  
Textured black wall support.

40408SP140BT  
40408SP140GT  
40408SP140NT

### Ceiling rose



White profile ceiling rose 2 m.  
Grey profile ceiling rose 2 m.  
Black profile ceiling rose 2 m.

50501CONJFLB  
50501CONJFLG  
50501CONJFLN

### Continuous line wiring with quick connector



Wiring line 3 poles  
Wiring line 5 poles

50501CABLC3P  
50501CABLC5P

### Joining piece



Joining piece

40408UNION140

## OPTIONS

### Dali adjustment



Add "R" to the product's code

### Emergency kit 1 hour



Emergency kit 1 hour

50501KITEME1

### Possibility to cut 45 degree angle



Possibility to cut 45 degree angle under project

### High flux led strip



High flux led strip