

40402170X4C2D

PF170-CD DE EMPOTRAR 39,9W 4000K LOUVER 850mm



Double strip linear luminaire with three-dimensional bright aluminium lamellas, for continuous lines or as single luminary, to make a control in dazzle.

EFFECTIVE LIGHTING INFORMATION

FLUX	4635,04Lm
LM/W	115,90Lm/w
Consumption	39,9W
Opening angle	89,2°

LED FEATURES

Colour temperature	4000K
LED efficiency	160 Lm/W @TA=25°C
MacAdam Ellipse	3
Lifetime	50.000H @TA=25°C
Lighting flux maintenance	L80
LED deterioration	B10
CRI	80
UGR	<19

FEATURES

	Hanged/surface
	5 years guarantee
	Water tightness
	Mechanical resistor
	1.5Kg
	<19
	855x112mm

ELECTRICAL INFORMATION

U_{IN}	230V/50Hz
ON/OFF	On/Off Power Supply
	Class I



RAL9003 (Text. White)

RAL9006 (Text. Grey)

RAL9005 (Text. Black)



40402170B4C2D




40402170G4C2D




40402170N4C2D

* For other finishes, please, ask for availability.

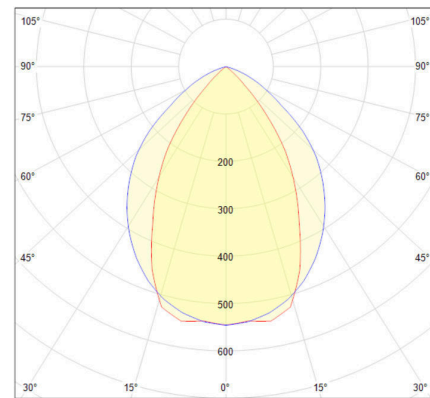

MEASUREMENTS

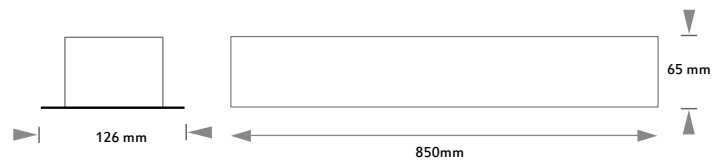

ACCESSORIES

Endcap



Textured white endcap.
Textured grey endcap.
Textured black endcap.

40410170SPBT
40410170SPGT
40410170SPNT

Suspension kits



Suspension kits

40408SUSPEPF

Support



Textured white wall support.
Textured grey wall support.
Textured black wall support.

40408SP140BT
40408SP140GT
40408SP140NT

Ceiling rose



White profile ceiling rose 2 m.
Grey profile ceiling rose 2 m.
Black profile ceiling rose 2 m.

50501CONJFLB
50501CONJFLG
50501CONJFLN

Continuous line wiring with quick connector



Wiring line 3 poles
Wiring line 5 poles

50501CABLC3P
50501CABLC5P

Joining piece




Joining piece

40408UNION140

OPTIONS

Dali adjustment



Add "R" to the product's code

Emergency kit 1 hour



Emergency kit 1 hour

50501KITEME1

Possibility to cut 45 degree angle



Possibility to cut 45 degree angle under project

High flux led strip



High flux led strip